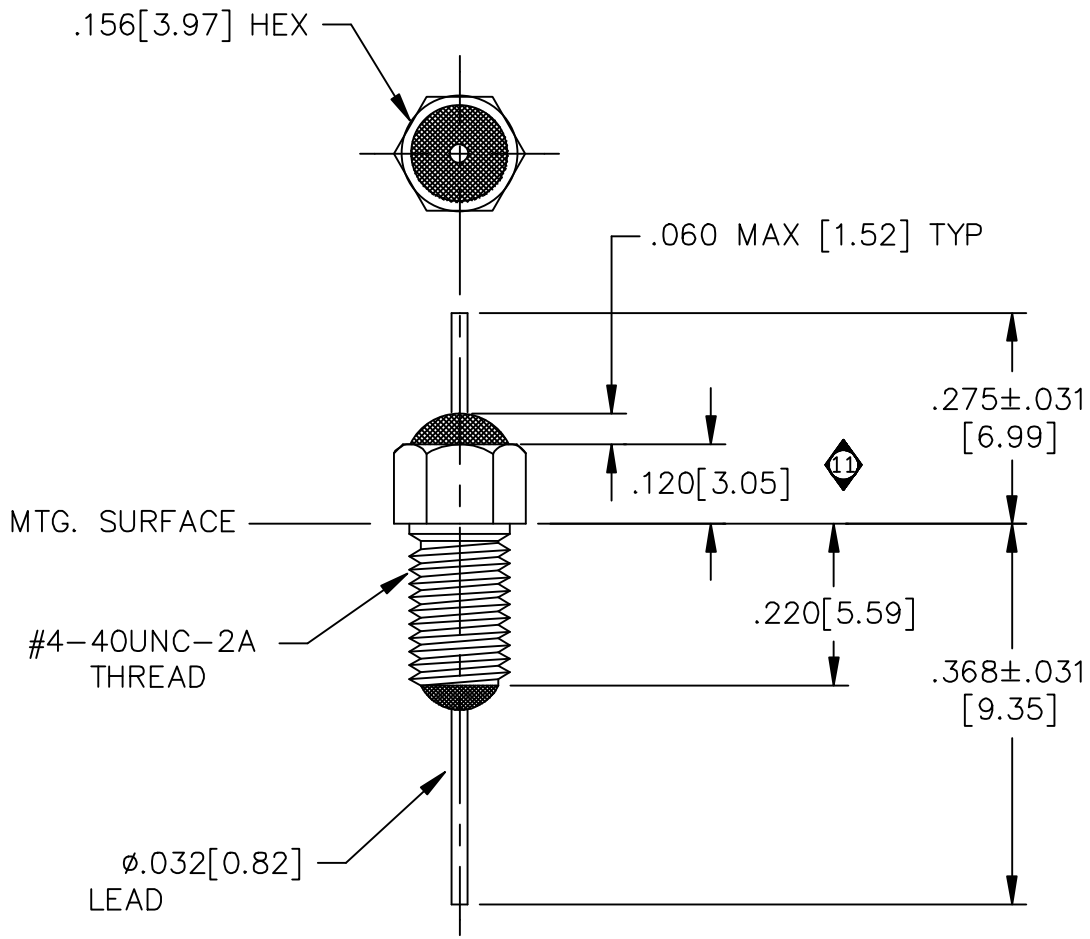

LEAD FINISH: SOLDER	
BUSHING FINISH: SILVER	
CAPACITANCE	100pF
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE	85°C 300VDC MAX. 125°C 200VDC MAX.
D.C. RESISTANCE	.005ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	--
30	--
100	3
1 GHz	20
10 GHz	28

SCHEMATIC



MARKING:

PART: S101P
BAG:
SCI 9900-381-6020
DATE CODE
LOT NO.
QTY./BAG (100 MAX.)

NOTES:
1. SUGGESTED MOUNTING HOLE = ø.120
2. HARDWARE IS INCLUDED.

REV. NO.	CHANGE NOTICE
11	CN 211524
10	CN 197243
09	CN 190641
08	CN 189484
07	CN 187040

TOLERANCES UNLESS OTHERWISE SPECIFIED
Fractions ± 1/64
Dec. .xx±
Dec. .xxx±.010
Angles ±0° 30′
CODE IDENT. NO. OLSP2

SPECTRUM CONTROL INC.

ERIE, FAIRVIEW PENNSYLVANIA

Dwn. JKAUFFMAN
Date 10-12-98
Engr. T. Taylor
Scale NONE

Description FEED THRU RESIN SEAL FILTER

9900-381-6020